

opticon

HR ED Fieldsopes

User Instructions and 30 Year Guarantee



Models

HR 66 GA ED


HR 66 GA ED/45

HR 80 GA ED

HR 80 GA ED/45

HRED0217

Main Features & Specifications

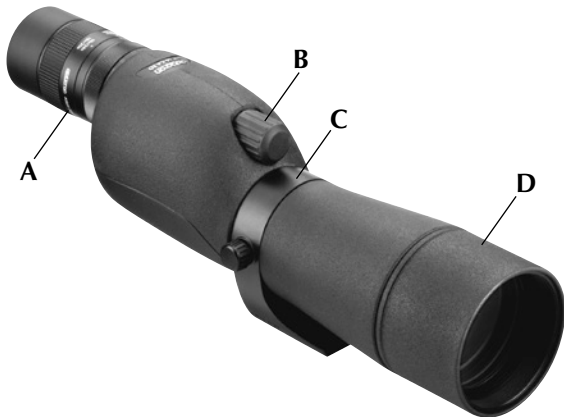

- A** Interchangeable eyepiece (not included).
- B** Rubber armoured focus wheel with contoured ribs to maximise comfort and handling with or without gloves.
- C** Tripod sleeve with +/- 90° rotation and large footprint tripod adapter socket.
- D** Retractable lens hood - extend when viewing in bright sunlight.

Fieldscope includes an integrated rubber objective lens cap (not illustrated).

Specifications	66 ED	66 ED/45	80 ED	80 ED/45
Product Code	41002	41003	41006	41007
OG Dia (mm)	66	66	80	80
Close Focus (m)	5	5	8	8
Length (mm)	290	330	370	405
Weight (g)	1210	1278	1635	1703

Eyepieces

Eyepieces	• SDLv2	• HDF			• HR		
Product Code	40936	40810	40831	40861	40930	40931	41145
Magnification 66	18-54x	20xWW	28xWW	88x	23xWA	30xWA	20-60x
Magnification 80	24-72x	27xWW	38xWW	120x	31xWA	41xWA	27-80x
Eye Relief (mm)	20-18	22	16	16	18	17	20-16

Getting Started

Your HR ED fieldscope will bring a new dimension to long range observation bringing far away subjects into clear and sharp focus.

1. To minimise image shake caused by the high magnification, the instrument should be supported using a suitable tripod or mount.
2. Connect the fieldscope to the tripod or mount using the tripod socket located on the underside of the tripod sleeve.
3. Make sure the eyepiece is attached securely. The retractable rubber eyecup should be used in the down position when wearing glasses. This ensures the maximum available field of view is obtained. Be sure to return the eyecup to the up position if you or anybody else wants to view without glasses.
4. To focus, locate the subject in the centre of the field of view and rotate the focus wheel until the subject comes into sharp focus.
5. If you are using a variable magnification or zoom eyepiece set the magnification to minimum when trying to locate your subject, only zooming once the subject is centred. With some eyepieces a small amount of refocusing may be required as the zoom is adjusted.
6. The retractable lens hood should be extended when viewing in bright sunlight.

WARNING. Never under any circumstances use a fieldscope to view the sun. Doing so will cause serious damage to your eyes.

Waterproof Cases

Stay-on-the-scope waterproof in Green.

Water resistant multi-layer padded cases individually designed to fit each model. Protects instrument while fitted to a tripod and in use. Includes removable end caps and adjustable neoprene carry strap for extra comfort.



Care & Cleaning

To clean outer glass surface of the eyepiece and objective lens, gently remove excess dirt and dust using a compressed air device or blower brush. **Caution.** Hard and persistent rubbing of dirty surfaces can cause abrasive scratches on the surface of the glass which may distort viewing. Breathe on exposed glass surface and then wipe with an optical cleaning cloth (code 30277) in a circular motion until the surface is clean again. Do not attempt to dismantle the instrument as this will invalidate the guarantee.

Whenever possible store in a stable dry atmosphere away from moisture. For extra protection, use the gift box or one of the optional cases available.

Telephotography

Telephotography using SLR cameras (digital or film) and compact system cameras. In this system the camera lens is substituted for the fieldscope + telephotoadapter or fieldscope + eyepiece + photoadapter. To convert your HR fieldscope into a telephoto lens (HR 66 800mm¹/f.12, HR 80 900mm¹/f.11.3), you will need a 40215 telephotoadapter. Alternatively connect a suitable push fit photoadapter to your viewing eyepiece.² A T-mount is required to connect the assembly to the camera body.

Notes. Focusing is facilitated on the fieldscope. Camera may need to be operated in manual mode with shutter locks disengaged where necessary. The high magnification to aperture ratios result in slower shutter speeds compared with conventional telephoto lenses so choose an ISO setting of 400. For 35mm SLRs 400 ASA film is recommended. If possible use a cable release or remote control to reduce camera shake when operating the shutter.


¹ This is an approximate figure based on 35mm SLR cameras. DSLR/compact system cameras use different sized image sensors compared to 35mm so an equivalent telephoto conversion figure must be calculated separately.

² For information on push fit photoadapters visit our Digiscoping & Telephotography pages at www.opticron.co.uk

Digiscoping with digital compact cameras, camcorders and mobile phones

Shooting high magnification photos and video through your fieldscope is possible if you have a suitable camera, camcorder or mobile phone. To find out how suitable or not your device is for digiscoping, position it up to the viewing eyepiece and see if an image appears on the screen. You may have to position the unit a few mm away from the eye lens of the eyepiece and increase the zoom to get a full frame image.

To find out more about bespoke digiscoping kits and universal mounts and brackets visit the Digiscoping & Telephotography pages at www.opticron.co.uk or contact Sales on +44 (0)1582 726522.

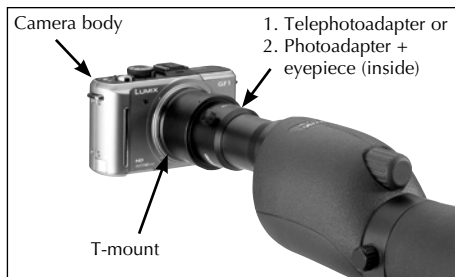

Guarantee

Please keep this Guarantee Card in a safe place

Model:.....

Serial No: Purchase Date:.....

Dealer:

Opticon HR ED fieldscopes are of a very high quality both in their performance and construction. We guarantee some parts in these instruments for up to 30 years under the following conditions:

- (i) In the case of defects attributable to faulty processing or materials, we will assume responsibility for the labour and material costs during the first 10 years after purchase. We reserve the right to decide whether defective parts should be repaired or replaced.
- (ii) During the next 20 years we will assume responsibility for material costs only, charging corresponding labour costs.
- (iii) We will accept no liability for damage caused by incorrect use or for any repairs or actions which have been carried out outside our firm.
- (iv) Rubberised coverings are excluded from the guarantee.

This guarantee is in addition and does not affect your statutory rights.

Registration

If you would like to register your purchase with us please visit www.opticron.co.uk and complete the online Product Registration Form.

Alternatively please telephone us during normal working hours on the numbers given. We will need the product name and serial number (if applicable), purchase date and outlet, your name and postcode.

Registration is voluntary and failure to register will not diminish your rights under the guarantee.

Privacy

Opticron takes your privacy seriously and we do not share personal information with other companies.

opticon

Address: Opticon, Unit 21, Titan Court, Laporte Way, Luton, Bedfordshire, LU4 8EF, UK

Phone: +44 (0)1582 726522 **Fax:** +44 (0)1582 723559 **Email:** sales@opticon.co.uk